




610 S. Maumee Street, Tecumseh, MI 49286
 Ph: 517-424-0577 www.ididit.com

CUSTOM

UNIVERSAL TILT/TELE COLUMN SHIFT (Standard measurements are shown)

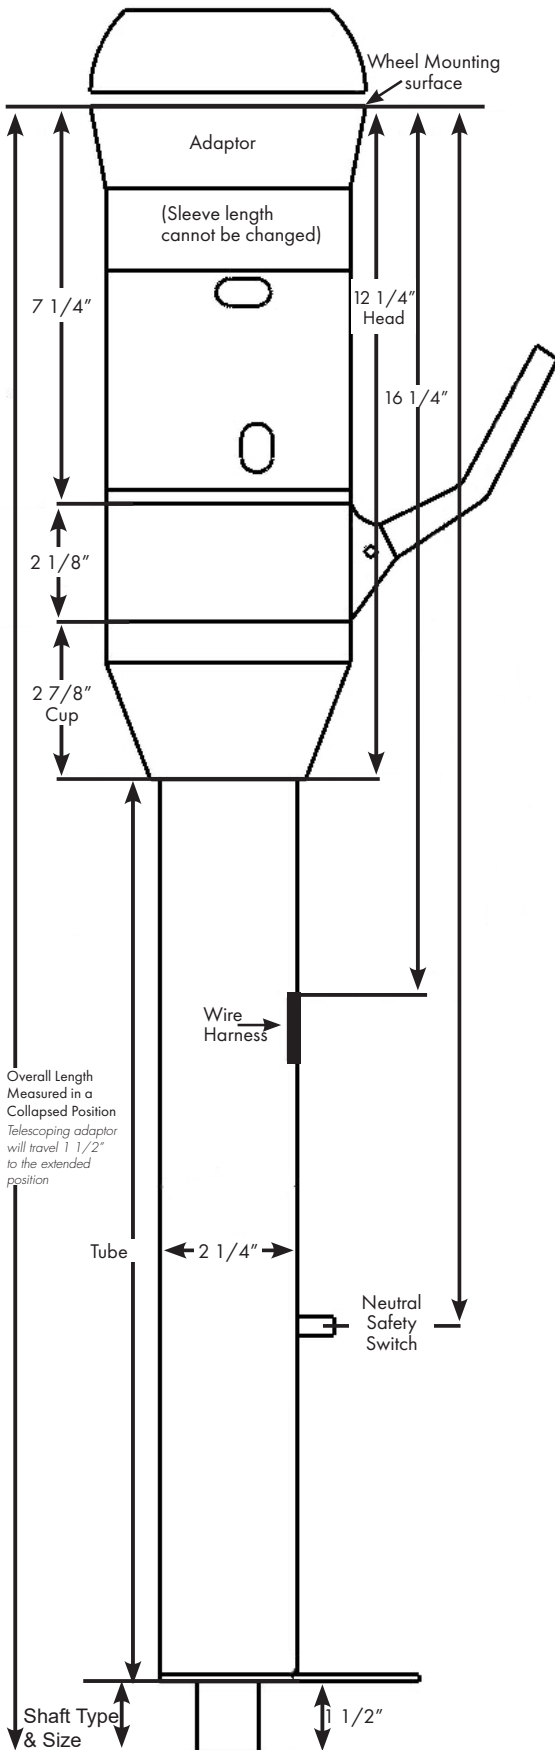

To customize your column please download this form & fill in the fields below. Mark the customer drawing if necessary, add any additional comments and sign. Once you are satisfied, save the filled out form and email it to us at sales@ididit.com. Alternatively you can also fax this document to us at (517) 424-7293

Reposition Wire Harness: _____" from Top of Column
 Overall wire harness position is measured from top of head to top of wire harness location. Standard is 13 1/4". Max total is 22".

Rotation of Wire Harness: _____ : _____ o'clock (per half hour)
 Rotation starts at 12 o'clock from seating position

Add/Move Neutral Safety Switch: _____" (up to 2" from bottom of sleeve)
 Neutral Safety Switch is measured from top of sleeve to middle of switch. **Switch must be located below wire harness.**

Rotation of Neutral Safety Switch: _____ : _____ o'clock
 Rotation starts at 12 o'clock from seating position

Change Cup Length: _____" Minimum of 5/16", Standard is 2 7/8"
 Shortened cup lengths may expose internal column wiring.

Tube Diameter (check one): 2" 2 1/4" (Standard)

Shaft Length: _____" Out of tube (Max 8")

Shaft Type (check one): 1" 48 3/4" DD 1" DD 3/4" 36

Columns under 22" can ONLY be built using 3/4" DD output shaft

Overall Length: (from top of head to the bottom of shaft) _____"

Ignition: Yes No

What type of Adaptor: 5-Bolt 6-Bolt 9-Bolt Brand: _____
 3-Bolt not available in Tilt/Tele

Column Finish (check one): Paintable Steel Chrome Black

Vehicle: _____ Year: _____

Additional Comments: _____

Name: _____

Phone: _____ Email: _____

By typing my name below I agree to recognize this as my legal signature for this document. The information I have supplied is correct and I assume responsibility for the requests that have been made on this form.

Signature: _____

Date: ____/____/____