




# CUSTOM

## UNIVERSAL TILT/TELE FLOOR SHIFT COLUMN (Standard measurements are shown)

610 S. Maumee Street, Tecumseh, MI 49286  
Ph: 517-424-0577 www.ididit.com

To customize your column please download this form & fill in the fields below. Mark the customer drawing if necessary, add any additional comments and sign. Once you are satisfied, save the filled out form and email it to us at sales@ididit.com. Alternatively you can also fax this document to us at (517) 424-7293.

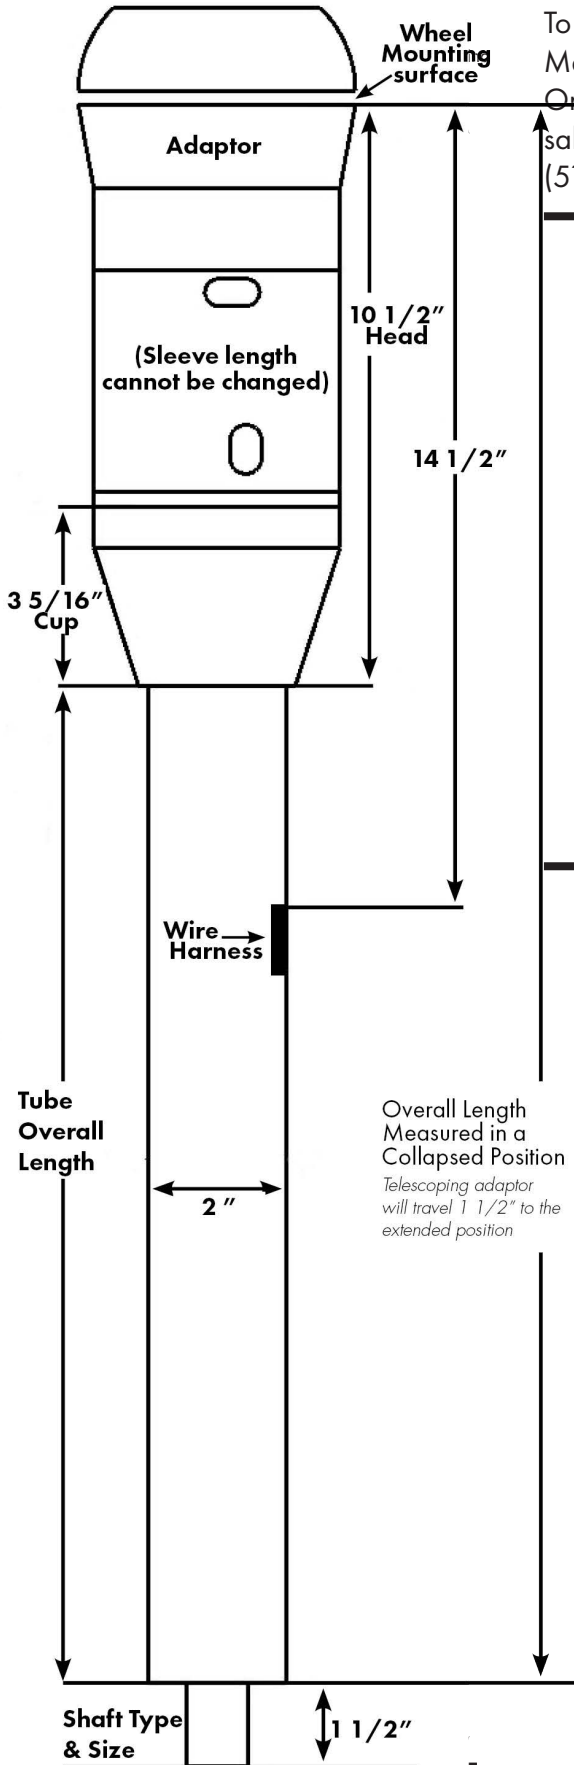

Reposition Wire Harness: \_\_\_\_\_" from Top of Column  
 Overall wire harness position is measured from top of head to top of wire harness location. Standard is 14-1/2". Max total is 22".  
 Rotation of Wire Harness: \_\_\_\_\_ : \_\_\_\_\_ o'clock (per half hour)  
 Rotation starts at 12 o'clock from seating position  
 Change Cup Length: \_\_\_\_\_" Minimum of 1 1/2", Standard is 3 5/16"  
 Shortened cup lengths may exposed internal column wiring  
 Tube Diameter (check one):      2" (Standard)      2 1/4"  
 Shaft Length: \_\_\_\_\_" Out of tube (Max 8")  
 Shaft Type (check one):    1" 48    3/4" DD    1" DD    3/4" 36  
 Columns under 22" can ONLY be built using 3/4" DD output shaft  
 Overall Length: (from top of head to the bottom of shaft) \_\_\_\_\_"  
 Ignition:    Yes    No  
 What type of Adaptor:    5-Bolt    6-Bolt    9-Bolt    Brand: \_\_\_\_\_  
 3-Bolt not available in Tilt/Tele  
 Column Finish (check one):    Paintable Steel    Chrome    Black

Vehicle: \_\_\_\_\_ Year: \_\_\_\_\_  
 Additional Comments: \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

Name: \_\_\_\_\_

Phone: \_\_\_\_\_ Email: \_\_\_\_\_

By typing my name below I agree to recognize this as my legal signature for this document. The information I have supplied is correct and I assume responsibility for the requests that have been made on this form.

Signature: \_\_\_\_\_

Date: \_\_\_\_/\_\_\_\_/\_\_\_\_