



Retrofit Steering Column

INSTALLATION INSTRUCTIONS


for 1967 Mustang



www.ididitinc.com

610 S. Maumee St., Tecumseh, MI 49286

PH: (517) 424-0577 FAX: (517) 424-7293

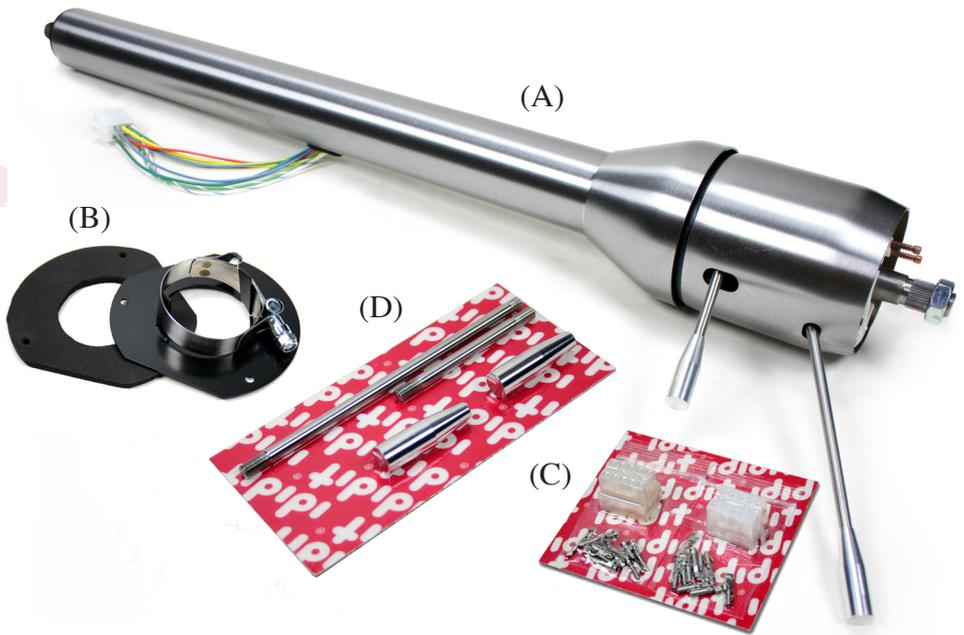

The ididit **1967 Mustang** Steering Column comes complete with these components:

- (A) Column (*Paintable Steel column pictured*)
- (B) Floor Mount Plate with Clamp & Gasket
- (C) Male & Female Wiring Plugs with Terminals
- (D) Instructions & Dress Up Kit

We will work through this installation using all these parts. For instruction purposes we will assume the vehicle is all original and has a factory manual steering gear box and an OEM harness.

These instructions are the same for the Right Hand Drive column.

INDEX

OEM COLUMN REMOVAL.....	1
MODIFYING YOUR SHAFT	1-2
WIRING INSTALLATION	3-4
INSTALLATION OF COLUMN.....	4-5
INSTALLATION OF KNOBS & LEVERS	5
STEERING WHEEL INSTALLATION	6

OEM COLUMN REMOVAL:

Disconnect positive battery cable.

To remove the horn button on your stock steering wheel, push it in, then rotate counter clockwise. (Figure 1)

Remove the nut and use a wheel puller to pull the original steering wheel off the original column. (Figure 2)

Now go under the dash and disconnect the wire plug from the column to the under dash harness.

Remove the three screws that hold the gasket to the fire wall.

Now you can remove the two screws from the dash mount.

Rotate the column left and right in order to loosen it and then proceed to pull the column back toward the driver to remove it from the car. There will still be a 3/4" round shaft sticking out from the gearbox into the driver compartment.



(Figure 1)




(Figure 2)

MODIFYING YOUR SHAFT:


Measure out 4" from the face of the nut on the gearbox and cut shaft. (Figure 3)

The shaft of the gearbox will now need to be cut into a DD shaft. This is a round shaft with flats centered on two sides. An easy

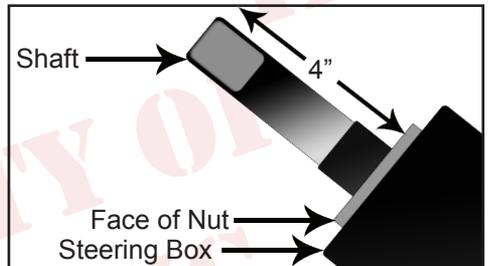

(Figure 3)

way to do this is to make a paper template. Create your own template by using the measurements from the diagram below.

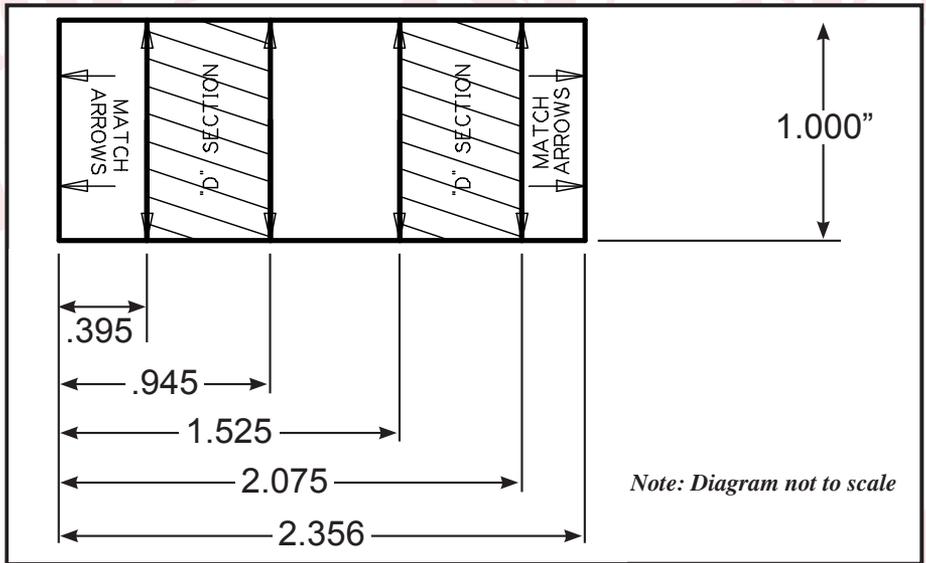


Starting from an 1/8 from the bottom, wrap the paper template around the shaft and match the horizontal arrows together.

Mark the shaft at the 8 vertical arrow points and draw a line down the length of the shaft, connecting the marks. This will create the shaded “D” sections found on the template.

With a grinder or similar tool, grind flat the shaded “D” sections to match the DD shaft. As you work, use the coupler as a guide and test fit to ensure proper fitting.

Another option would be to remove the gearbox and take it to your local machine shop to be modified.

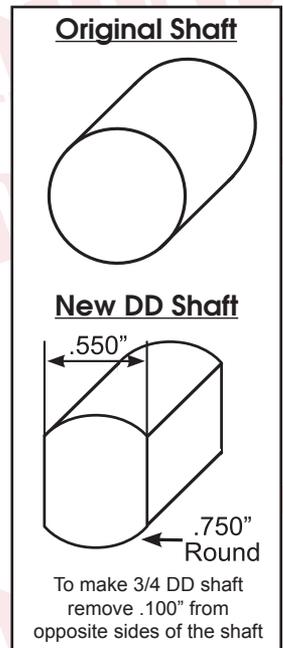

WIRING INSTALLATION:

The first few tasks, you can do more easily with the column on a work bench before you put it in the car

WIRING

Included in the kit are male and female white plastic connectors and male & female terminals. The wiring from the switch can be made to fit either this connector OR the original connector. The pins are the same size as the original.

USING ORIGINAL CONNECTOR: (EASIEST)



Remove the pins from the original wiring block on the original steering column and insert the wires on your new steering column into their proper location on the original block. *The color codes should match up using the chart on page 4. You will more than likely have to use a tool to remove the pins from the plastic connectors. Figure 4 shows two types of tools commonly used.



(Figure 4)

USING ALL NEW WIRING PROVIDED:

Included with your new column are male and female blocks along with the necessary terminals and wiring diagram. You will have to remove the pins from the original connector off the car side of the harness and insert the pins into the back side of the new block provided. Insert each terminal completely until each one snaps into place. You can verify it is secure by lightly tugging on it. You may need to bend the locking tab back out slightly. Then you will also install the new block on the column harness. Again, matching the chart found on the next page.

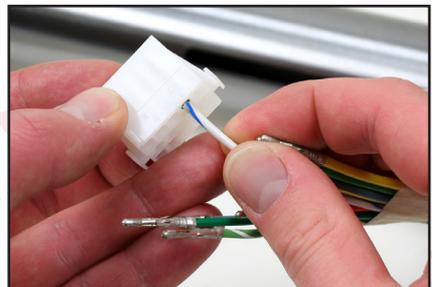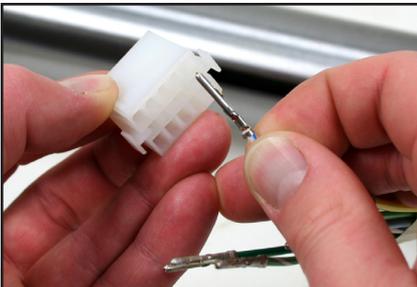

WIRING CHART:

Turn Signal Switch - *Colors under dash may not match.*

<i>Orange w/Blue</i>	<i>Right rear turn and brake</i>
<i>Green w/Orange</i>	<i>Left rear turn and brake</i>
<i>White w/Blue</i>	<i>Right front turn signal</i>
<i>Yellow</i>	<i>Horn (Power)</i>
<i>Green w/White</i>	<i>Left front turn signal</i>
<i>Green</i>	<i>Brake feed from brake switch</i>
<i>Blue w/Yellow</i>	<i>Horn</i>
<i>Blue</i>	<i>Turn signal feed</i>
<i>White w/Red</i>	<i>Flasher Feed</i>

**Included with the connector are new terminals for the car side if your originals are not usable or if you have an aftermarket harness and do not have matching terminals.*

INSTALLING YOUR IDIDIT COLUMN

The '67 Mustang will use a 3/4"DD x 3/4"-36 coupler and depending on whether you have a Late or Early Mustang will require additional pieces.

1967 Long Box Kit Part#: 3000313449

Kit Includes: 3/4"DD x 3/4"-36 Coupler, you will also need to modify your original shaft.

1967 Short Box Kit Part#: 3006002100

Kit Includes: 3/4"-36 x 3/4"DD Coupler, 2 5/16" Long DD Shaft, 3/4"DD x 3/4"-36 Rag Joint.

If you are using a Rack and Pinion set up you will have to design your own way to hook the column to the rack. We can help with U-Joints and shafting, but because of headers and different companies making rack kits we will need more information from you to get the correct installation.

Take the two of the above mentioned kits and install them onto the original steering box per year & kit.

Tip.. *Please follow the manufactures instructions on the Coupler & Rag Joint installation. These instructions vary by manufacturer. But when all is said and done, ididit recommends that you use Loctite on the threads.*

Next, slide the floor mount plate, clamp and gasket up the tube of your new Mustang column. The nut on the clamp should be on the bottom of the tube and facing the driver's side door/fuse box. You can temporarily hold the mount in place with a piece of masking tape while you install the column in the car. At this part of the installation an extra set of hands may be very helpful. With one hand in the middle of the column and one at the top, slide the column between the pedals and through the hole in the firewall. Engage the coupler onto the gearbox. Set the column up into the original dash mount* and loosely install the original bolts into the original clamp. The tab on the dash mount should be toward the firewall and engaged into the slot in the bottom side of the tube on the steering column. Depending on its condition, you may want to replace the rubber in the dash mount. We have found that a great substitute is the rubber from a bicycle inner tube that you may have laying around.

(ididit has a '67 Mustang underdash mount made for this application if you have misplaced or damaged your original. That part number to order is: 2312300010)



Now, if everything is positioned well, you can go back and tighten everything up. Start with the dash mount and tighten original two bolts to 108 – 156 inch lbs*. Next, tighten up the coupler set screw and locking nut to manufacturer's specs. Lastly, remove the tape holding the floor mount to the column. Using the 3 sheet metal screws, secure the floor mount and gasket to the firewall. Then tighten the floor mount clamp onto the mount tabs and column to 50 inch lbs*.

**(not foot pounds)*

KNOB & LEVER **INSTALLATION**

After removing all items from the package, screw the knobs onto the levers. The tilt lever (the shorter of the two levers) is installed on the left side of the column in the threaded hole located closest to the dash. We recommend using Loctite

The turn signal lever (longer of the two levers) is installed into the threaded hole closest to the top of the column.



STEERING WHEEL INSTALLATION



OEM Wheel - Must be for the same year application as the column. **Use of a different year of wheel will result in damage to the turn signal switch.**

Aim the road wheels so they are pointing straight ahead. Lower the stock steering wheel onto the column and center it in its proper position. Be very careful to align the canceling pins on the back of the wheel. Tighten the NEW nut that came with the column to 45 ft lbs. You may need to adjust the wheel a bit after driving the vehicle to get the wheel just where you want it. Re-install the horn and spring by pushing in and turning clockwise to lock it into place.

Hook the battery back-up and verify that your signals, brake lights, etc are operating properly. Double check all fasteners including coupler, dash mount and floor mount to make sure they are all tight.

Need Further Assistance?

ididit has been serving the rodding community since 1986 and we take pride in our outstanding customer service. If you need further assistance, feel free to call us at (517) 424-0577 during our normal business hours. You can also email us at tech@ididit.com. Go to www.ididitinc.com/contact-us for hours of operation.

Need A Visual?

Go to www.ididitinc.com/videos to watch installation videos, tech tips & more!

No part of this guide may be reprinted, reproduced or utilized in any form without the express written permission of ididit.

2009 ididit
All Rights Reserved
Printed in the USA

ididit

610 S. Maumee St., Tecumseh, MI 49286

(517) 424-0577 • (517) 424-7293 fax

www.ididitinc.com